


Electric Curtain Track Systems





Application Chart


Specification	Applications				Profile				Features / Options						Fitting Options			Fitting Surfaces		System					
	Weight Range	Single Stack	Pair Stack	Multiple Stack	Asymmetric	Profile Number	Dimensions in mm	Gliding Channel	Special Recess Profile available	Min. Bending Radius (mm)	Wave Glider-Cord	Roller or Gliders	Suitable for Bus Technology	Timer / IR Facility	Light Sensor	Radio Control	Manual Override	Ceiling Fix	Wall Fix		Recess Fix	Wood	Concrete	Suspended ceiling	
kg	●	●				2191		5.4		250	●			●	●		●	●	●		●	●		5090	
kg	●	●	●			2191		5.4	●	250	●	●		●	●	●	●	●	●	●	●	●	●		5200
kg	●	●	●	●		5141		5.4		500		●		●	●	●		●	●		●	●		5220	
kg	●	●	●			2191		5.4	●	250	●	●	●		Optional	●	●	●	●	●	●	●	●		5400
kg	●	●	●	●		5141		5.4		500		●	●	●	Optional	●		●	●		●	●		5420	
kg	●	●	●	●		5301		5.4		500		●		●	Optional	●		●	●		●	●		5300	
kg	●	●	●	●		5810		10		500		●				●			Wall or Floor			●	●		5800

Light-weight applications

Medium-weight applications


Heavy-duty applications

Electric track load charts

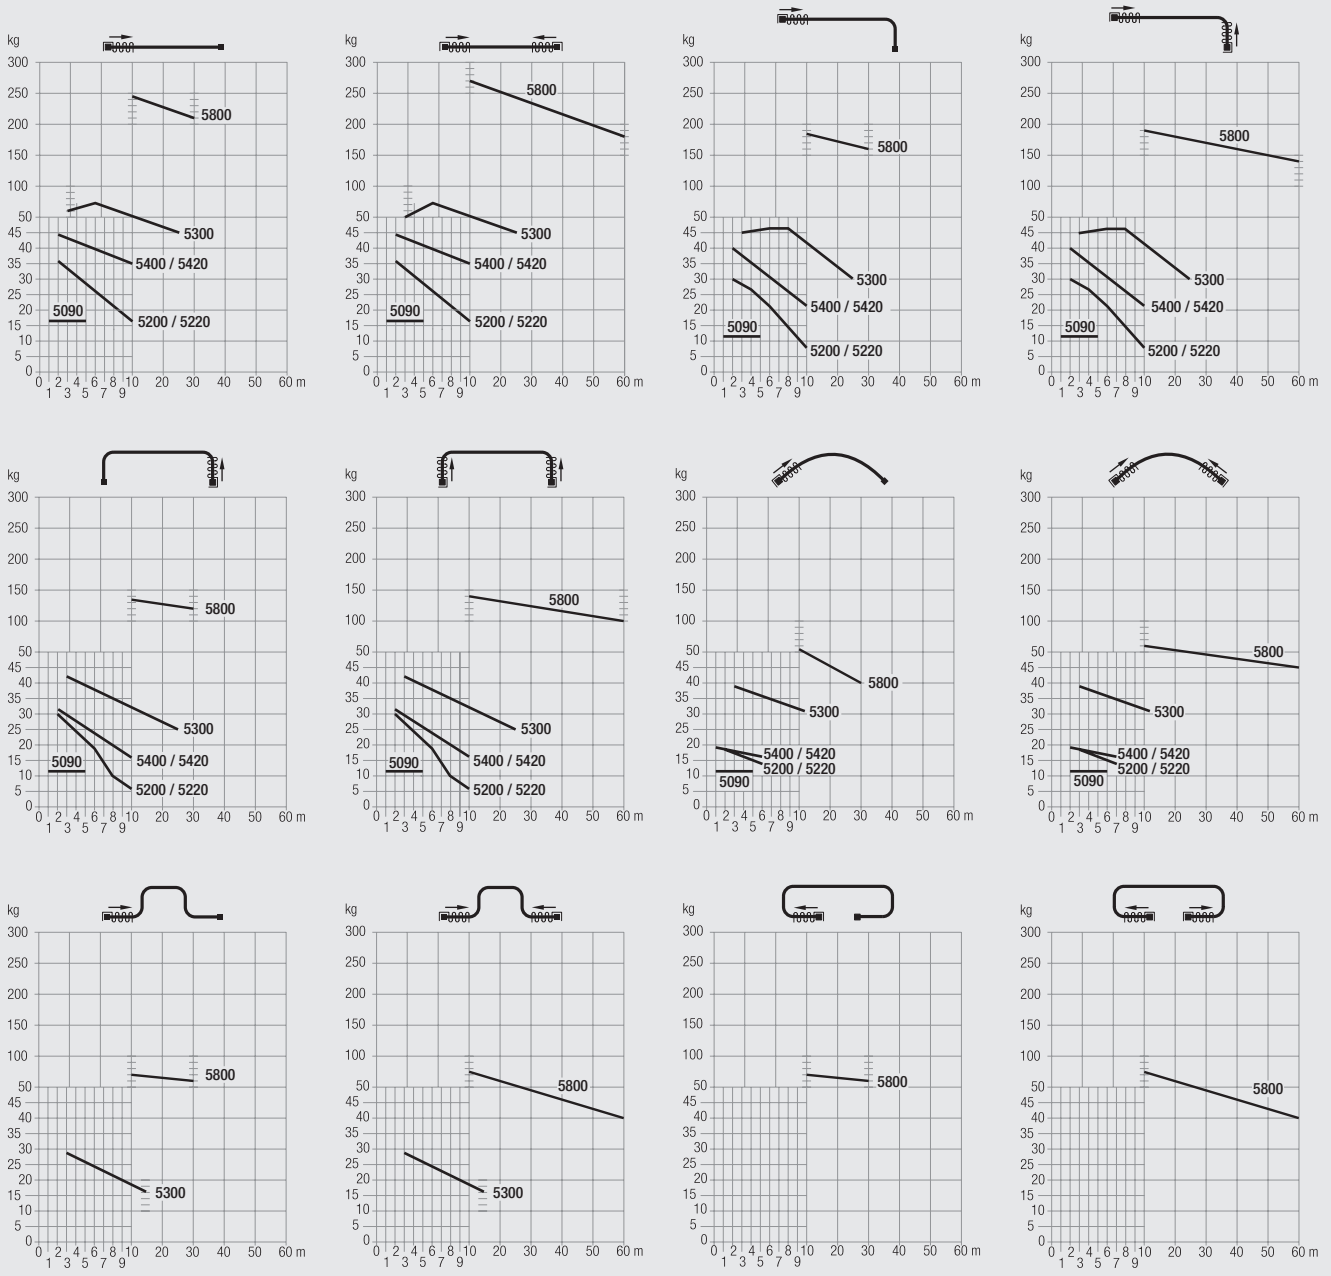

The curtain heading must be completely below the track or the guarantee is invalid.







www.silentgliss.co.uk

Silent Gliss Ltd
Pyramid Business Park
Poorhole Lane
Broadstairs
Kent
CT10 2PT
Great Britain

Tel: 0044 (0) 1843 863571
Fax: 0044 (0) 1843 864503
sales@silentgliss.co.uk